

# PLC ProTech Ltd.

Industrial Automation Components

## TECHNICAL DOCUMENTATION

### SYSTEM INTEGRATION & REPLACEMENT SUPPORT GUIDE

---

PLC ProTech Ltd. stands at the intersection of complex industrial challenges and high-performance solutions. As a premier global supplier, we specialize in delivering 100% Brand New, factory-sealed components from world-leading brands including ABB, GE, and Honeywell. We maintain an extensive inventory of hard-to-find and discontinued PLC/DCS modules, offering Same-Day Dispatch to over 150 countries. Backed by a 12-month warranty, we empower your operations with technical integrity and peace of mind.

[GET INSTANT QUOTE & INVENTORY STATUS >>](#)

# IMPORTANT PRODUCT INFORMATION

## READ THIS INFORMATION FIRST

**Product: IC693 CPU Modules with Firmware Release 9.00**

IC693CPU351-GP

IC693CPU352-DF

IC693CPU363-AA (new)

## Introduction

This document contains information that is not available in any other publication; therefore, we recommend you save it for future reference. This document discusses the features of the newly released firmware version 9.00 for current CPU modules IC693CPU351 and IC693CPU352, as well as for the new CPU, IC693CPU363.

## New Features and Functionality of Firmware Release 9.00

- **Software Floating-Point.** The CPU351 and CPU363 support all of the floating-point function blocks that are currently supported by the CPU352. They are implemented in firmware using floating point emulation. These Floating-Point math function blocks are described in the *IC693 PLC Reference Manual*. The CPU352 continues to support Floating-Point math via its built-in math coprocessor. The CPU352 offers a speed advantage over the other two in performing math functions.
- **User memory totals 240K bytes.** %R, %AI, and %AQ references are configurable up to 16K of %R, 8K of %AI and 8K of %AQ memory using the MS-DOS® PLC programming software, version 9.02. These three references will be configurable up to 32K in the next release (version 2.2) of the Windows® PLC programming software. Configuration instructions for this feature are described in the *MS-DOS IC693 Programming Software User's Manual*, and will be included in on-line help in the future release of the Windows PLC Programming Software, version 2.2.
- **Sequential Event Recorder.** A new function block, the Sequential Event Recorder, is available in firmware release 9.00. This function block can be used to record up to 1024 samples of 32 individual discrete (bit) references. This function block is described in the *IC693 PLC Reference Manual*.

## Hardware Identification

The following table shows the revision level of the circuit boards used in the current versions of these CPUs.

| CPU Catalog Number | Circuit Board ID       | Circuit Board Version     |
|--------------------|------------------------|---------------------------|
| IC693CPU351-GP     | CV3A2 (Main board)     | 44A737904-G01R02 or later |
|                    | CA3A2 (Daughter board) | 44A737909-G01R01 or later |
| IC693CPU352-DF     | CV3B2 (Main board)     | 44A737922-G01R02 or later |
|                    | CA3A2 (Daughter board) | 44A737909-G01R01 or later |
| IC693CPU363-AA     | CX3A1 (Main board)     | 44A739579-G01R05 or later |
|                    | ES3A1 (Daughter board) | 44A739604-G01R04 or later |

® MS-DOS and Windows are registered trademarks of Microsoft Corporation

## Firmware Upgrade Kits

If you wish to upgrade an existing CPU351 or CPU352 to firmware version 9.00, you may purchase the applicable kit identified in the following table. All previous versions are capable of being upgraded.

| Firmware 9.00 Upgrade Kit Catalog Number |  |
|--|--|
| CPU Catalog Number                       | Firmware Upgrade Kit Catalog Number    |
| IC693CPU351-(all versions)               | 44A736935-G11                          |
| IC693CPU352-(all versions)               | 44A739385-G04                          |
| IC693CPU363-AA                           | Not applicable. This is a new product. |

## Firmware Identification

| CPU Catalog Number | Motherboard Firmware Version             | Daughterboard Firmware Version           |
|--------------------|--|--|
| IC693CPU351-GP     | Main: R9.00 (42A1)<br>Boot: R9.00 (33A1) | Main: R9.00 (40A1)<br>Boot: R1.00 (12A2) |
| IC693CPU352-DF     | Main: R9.00 (42A1)<br>Boot: R9.00 (33A1) | Main: R9.00 (40A1)<br>Boot: R1.00 (12A2) |
| IC693CPU363-AA     | Main: R9.00 (42A1)<br>Boot: R9.00 (33A1) | Main: R9.00 (40A1)<br>Boot: R2.00 (30A1) |

## Functional Compatibility

- The Windows PLC Programming Software version 2.00 or later must be used to take advantage of C programming or Sequential Function Chart (SFC) subroutines.
- Version 4.00 of the C toolkit must be used for C programming.
- The MS-DOS PLC Programming Software Version 9.02 or later must be used to take advantage of the new features introduced in firmware release 9.00. These new features are listed in the section “New Features and Functionality of Firmware Release 9.00.” Note that the CPU363 can be configured with the MS-DOS PLC Programming Software Version 9.01, but only features prior to firmware release 9.00 are supported in that software version.

## Operating Notes

### User Flash Contents

User information, consisting of program, configuration, CPU ID (used for SNP communications), and status tables in RAM memory, will automatically be cleared if the CPU firmware in flash memory is changed. So you will need to restore these if upgrading firmware. A recommended procedure is to first back up your user information from RAM memory to Flash memory. Then write your new firmware to Flash memory (firmware is stored in a different location in Flash memory than that used for storing user information such as program, configuration, etc.). Finally, write your user information back out of Flash into RAM memory. As an alternative, your user information (program, configuration, etc.) can be restored from a computer-based backup program folder using your PLC programming software. The SNP ID must be set separately, using the programming software or the Hand-Held Programmer (HHP).

## Important Product Information

---

GFK-1126U

### Firmware Upgrade Procedure

Note: The Model 35x and 36x CPU operating firmware is stored in FLASH memory. The firmware upgrade is provided on a floppy disk and must be serially downloaded from a Personal Computer. An IBM AT personal computer or better PC with a minimum 640K of RAM, one 3.5" floppy drive, MS-DOS version 3.3 or later (or Windows 95 or later), a hard drive, and one RS-232 serial port is required. In addition, a serial cable is required. The following serial cable kit is available from GE Fanuc:

IC690ACC901 Mini Converter Kit with cable (RS-232/RS-485)

Optionally, the cable can be assembled from the following parts:

IC690ACC900 RS-232 to RS-485/422 Converter Unit

IC693CBL303 15 Pin RS-485 Serial Cable

IC690CBL705 25 Pin RS-232 Serial Cable \*

IC690CBL702 9 Pin RS-232 Serial Cable \*

**\* Only one of these cables is required. Selection depends on PC Serial Port Connector.**

### Changing Firmware to an Earlier Version

If you have a CPU351 or CPU352 with firmware version 9.00, and you desire to install a pre-9.00 version of firmware, then a special upgrade disk must be obtained from GE Fanuc. Do not attempt to use a firmware version 8.10 or earlier upgrade disk on a CPU that contains firmware version 9.00. Note that pre-9.00 firmware versions do not support the CPU363.

### Option Module Revision Requirements

- **Ethernet Interface Module Compatibility.** All IC693 Ethernet Interface (IC693CMM321) modules used with these CPUs should be updated to IC693CMM321 firmware release 1.10 or later. This is also a requirement of the TCP/IP Ethernet version of the MS-DOS programming software. During a Run Mode Store (Alt + S hot key combination) of a large program block (greater than 14 kilobytes), the Ethernet module may time out, causing communications to fail. Changing the Communications Window to Run-to-Completion mode, or storing the program in Stop mode, will allow the store to take place successfully.
- **FBC Compatibility.** FBC version 3 or later is required for these CPUs.
- **GCM Compatibility.** Fab board R08 or later of the IC693CMM301 should be used with the CPU352.

### Writing Flash Using a Serial Programmer

When writing very large programs to flash memory, it may be necessary to increase the Windows PLC programming software request timeout value to avoid receiving a request timeout message. An upper bound of 25 seconds is typically satisfactory

## Problems Resolved in Firmware Version 9.00

### Keyswitch Configured as RUN/STOP Switch

Previously, when the keyswitch was configured as a RUN/STOP switch, moving the keyswitch to the STOP position would not affect the current PLC state if the PLC was already in either STOP NO/IO or STOP IO SCAN mode. In firmware version 9.00, the keyswitch will now change the PLC to STOP IO SCAN or STOP NO/IO based on the configured value, even if the PLC is already in a "STOP" mode.

### Storing IC693CMM321 Configuration with Windows PLC Programming Software Issue

It was possible to get a watchdog time-out failure when storing an IC693CMM321 configuration with the Windows PLC Programming software, Version 2.1 or earlier. This problem has been corrected in firmware version 9.00.

### RET\_PBLOCK\_LIST

The RET\_PBLOCK\_LIST service request would only function correctly with 24 or less subroutines in the program in firmware version 8.00. The request now functions correctly with any number of subroutines in version 9.00.

## Service Request #7

SVC REQ #7 would allow ladder logic to set certain illegal dates such as 2/29/01. Illegal dates are no longer allowed to be entered by the user program.

## Changes to Documentation

The *IC69\* PLC Serial Communications User's Manual* will be updated to describe the Generic Output and pager enunciation feature in its next revision (rev D). These features are supported by the CPU351, CPU352, and CPU363 CPUs' embedded serial ports.

### Sending a COMM\_REQ to the CPU351, CPU352, or CPU363 serial ports.

When sending a Communications Request (COMM\_REQ) to the CPU351, CPU352, or CPU363 serial ports, the SYSID of the COMM\_REQ must be 1 and the TASK ID must be 19 decimal for port 1 or 20 decimal for port 2.

### RTU

With the above exception about the SYSID and TASK ID fields, using RTU on the CPU351, CPU352, or CPU363 serial ports is the same as using RTU on a CCM, which is described in the *IC69\* PLC Serial Communications User's Manual*.

### Generic Output

Generic Output is selected for Port 1 or Port 2 of the CPU351, CPU352, or CPU363 CPUs by choosing "CUSTOM" as the mode for the port in the CPU Configuration and storing this to the PLC. Generic Output is accomplished by using the put string COMM\_REQ. Using the autodial COMM\_REQ with the put string COMM\_REQ accomplishes the pager enunciation feature as described below.

## Using Pager Enunciation and Generic Output

This feature allows the CPU351, CPU352, and CPU363 CPUs to automatically dial a pager via modem and send a specified byte string from Serial Port 1 or 2. Pager dialing and message transmission are set up by COMM\_REQ functions in the ladder logic.

### Note

To implement this feature, Serial Port 2 must be configured as a CUSTOM port as mentioned above in the "Generic Output" item.

Pager enunciation is implemented by three commands, requiring three COMM\_REQ command blocks:

**Autodial:** 04400 (1130H) -Dials the modem. This command works the same way that the SNP Master Autodial command 7400 does.

**Put string:** 04401 (1131H) - Specifies an ASCII string, from 1 to 250 bytes in length, to send from the serial port.

**Autodial:** 04400 (1130H) - It is the responsibility of the PLC application program to hang up the phone connection. This is accomplished by reissuing the autodial command and sending the hang-up command string.

**Important Product Information**

GFK-1126U

**Autodial Command Block**

The Autodial command automatically transmits an Escape sequence that follows the Hayes convention. If you are using a modem that does not support the Hayes convention, you may be able to use the Put String command to dial the modem.

Examples of commonly used command strings for Hayes-compatible modems are listed below:

| Command String        | Length   | Function   |
|-----------------------|----------|--|
| ATDP15035559999<CR>   | 16 (10H) | Pulse dial the number 1-503-555-9999                   |
| ATDT15035559999<CR>   | 16 (10H) | Tone dial the number 1-503-555-9999                    |
| ATDT9,15035559999<CR> | 18 (10H) | Tone dial using outside line with pause                |
| ATH0<CR>              | 5 (05H)  | Hang up the phone                                      |
| ATZ <CR>              | 4 (04H)  | Restore modem configuration to internally saved values |

Table 6-1 lists a sample COMM\_REQ command block that dials the number 234-5678 using a Hayes-compatible modem.

**Table 6-1. Sample Command Block for CUSTOM Protocol Autodial Command**

| Word | Definition            | Values   |
|------|-----------------------|--|
| 1    | 0009H                 | CUSTOM data block length (includes command string) |
| 2    | 0000H                 | NOWAIT mode  |
| 3    | 0008H                 | Status word memory type (%R)                       |
| 4    | 0000H                 | Status word address minus 1 (Register 1)           |
| 5    | 0000H                 | not used   |
| 6    | 0000H                 | not used   |
| 7    | 04400 command (1130H) | Autodial command number                            |
| 8    | 00030 (0001H)         | Modem response timeout (30 seconds)                |
| 9    | 0012 (000CH)          | Number of bytes in command string                  |
| 10   | 5441H                 | A (41H), T (54H)                                   |
| 11   | 5444H                 | D (44H), T (54H)                                   |
| 12   | 3332H                 | Phone number: 2 (32H), 3 (33H)                     |
| 13   | 3534H                 | 4 (34H), 5 (35H)                                   |
| 14   | 3736H                 | 6 (36H), 7 (37H)                                   |
| 15   | 0D38H                 | 8 (38H) <CR> (0DH)                                 |

## Put String Command Block

Table 6-2 lists a sample COMM\_REQ command block that sends the data string, “hello world” using the Put String command (04401). A maximum transmit timeout of 30 seconds is specified. The string data begins at Word 10. This command is similar to the Autodial command except that Put String does not send the escape sequence for Hayes-compatible modems.

The *Maximum Transmit Timeout* field specifies, in seconds, the maximum time interval the COMM\_REQ will wait for the entire string to be sent. If this time is set to 0, a default value of 4 seconds plus the time required to transmit the number of characters is used. If the string is not transmitted during the specified interval or the default interval, an error code is generated.

The *Number of Bytes in Command String* field specifies the length of the command string to be sent. This length includes all characters. A status code indicating successful transmission will be returned when the string has been completely sent out the serial port.

**Table 6-2. Sample Command Block for Put String Command**

| Word | Definition            | Values   |
|------|-----------------------|--|
| 1    | 0009H                 | CUSTOM data block length (includes command string) |
| 2    | 0000H                 | NOWAIT mode  |
| 3    | 0008H                 | Status word memory type (%R)                       |
| 4    | 0000H                 | Status word address minus 1 (Register 1)           |
| 5    | 0000H                 | not used   |
| 6    | 0000H                 | not used   |
| 7    | 04401 command (1131H) | Put String command number                          |
| 8    | 001EH                 | Maximum transmit timeout (30 seconds)              |
| 9    | 000BH                 | Number of bytes in command string                  |
| 10   | 6568H                 | h (68H), e (65H)                                   |
| 11   | 6C6CH                 | l (6CH), l (6CH)                                   |
| 12   | 206FH                 | o (6F), “ “ (20H)                                  |
| 13   | 6F77H                 | w (77H), o (6FH)                                   |
| 14   | 6C72H                 | r (72H), l (6CH)                                   |
| 15   | 0064H                 | d (64H)  |

## Important Product Information

GFK-1126U

### Status Word for Custom Protocol COMM\_REQs

A value of 1 will be returned in the COMM\_REQ status word upon successful completion of a CUSTOM protocol command. Any other value returned in the COMM\_REQ status word is an error code where the low byte is a major error code and the high byte is a minor error code.

Table 6-3. Status Codes for Custom Protocol

| Major Status Code | Description  |
|-------------------|--|
| <b>1 (01H)</b>    | Successful Completion (this is the expected completion value in the COMM_REQ status word).   |
| <b>12 (0CH)</b>   | Local CSTM_PROT error — Port configuration command 65520 (FFF0H). An error occurred while processing a local command. The minor error code identifies the specific error.  |
|                   | <b>2 (02H)</b>   COMM_REQ command is not supported.  |
| <b>13 (0DH)</b>   | Remote CSTM_PROT error — Put String command 4401 (1131H). An error occurred while processing a remote command. The minor error code identifies the specific error.   |
|                   | <b>2 (02H)</b>   String length exceeds end of reference memory type.   |
|                   | <b>3 (03H)</b>   COMM_REQ data block length is too small. String data is missing or incomplete.  |
|                   | <b>48 (30H)</b>   Serial output timeout. The serial port was unable to transmit the string. (Could be due to missing CTS signal when the serial port is configured to use hardware flow control.)                          |
|                   | <b>50 (32h)</b>   COMM_REQ timeout. The COMM_REQ did not complete within a 20-second time limit.   |
| <b>14 (0EH)</b>   | Autodial Error — Autodial command 4400 (1130). An error occurred while attempting to send a command string to an attached external modem. The minor error code identifies the specific error.                              |
|                   | <b>1 (01H)</b>   Not used.   |
|                   | <b>2 (02H)</b>   The modem command string length exceeds end of reference memory type.   |
|                   | <b>3 (03H)</b>   COMM_REQ Data Block Length is too small. Output command string data is missing or incomplete.   |
|                   | <b>4 (04H)</b>   Serial output timeout. The serial port was unable to transmit the modem autodial output. (May be due to missing CTS signal when the serial port is configured to use hardware flow control.)              |
|                   | <b>5 (05H)</b>   Response was not received from modem. Check modem and cable.  |
|                   | <b>6 (06H)</b>   Modem responded with BUSY. Modem is unable to complete the requested connection. The remote modem is already in use; retry the connection request at a later time.  |
|                   | <b>7 (07H)</b>   Modem responded with NO CARRIER. Modem is unable to complete the requested connection. Check the local and remote modems and the telephone line.  |
|                   | <b>8 (08H)</b>   Modem responded with NO DIALTONE. Modem is unable to complete the requested connection. Check the modem connections and the telephone line.   |
|                   | <b>9 (09H)</b>   Modem responded with ERROR. Modem is unable to complete the requested command. Check the modem command string and modem.  |
|                   | <b>10 (0AH)</b>   Modem responded with RING, indicating that the modem is being called by another modem. Modem is unable to complete the requested command. Retry the modem command at a later time.                       |
|                   | <b>11 (0BH)</b>   An unknown response was received from the modem. Modem is unable to complete the requested command. Check the modem command string and modem. The modem response is expected to be either CONNECT or OK. |
|                   | <b>50 (32H)</b>   COMM_REQ timeout. The COMM_REQ did not complete within a 20-second time limit.   |

## Documentation

Instructions for using these three modules can be found in the latest version of the following manuals:



**General Configuration Instructions:** *IC693 PLC Programming Software User's Manual*

**Ladder Logic Programming:** *IC693 PLC Reference Manual*

**Serial Communications:** *IC69\* PLC Serial Communications User's Manual, Rev. D*

## IC693CPU351-GP and IC693CPU352-DF Data

|  |   |
|--|---|
| <b>CPU Type</b>  | Single slot CPU module  |
| <b>Total Baseplates per System</b>   | 8 (CPU baseplate + 7 expansion and/or remote)   |
| <b>Load Required from Power Supply</b>   | 890 milliamps from +5 VDC supply  |
| <b>Processor Speed</b>   | 25 MegaHertz  |
| <b>Processor Type</b>  | 80386EX   |
| <b>Typical Scan Rate</b>   | .22 milliseconds per 1K of logic (Boolean contacts)   |
| <b>User Memory (total)</b>   | 240K (245,760) Bytes. Note: Actual size of available user program memory depends on the amounts configured for the %R, %AI, and %AQ configurable word memory types (described below). |
| <b>Discrete Input Points - %I</b>  | 2,048   |
| <b>Discrete Output Points - %Q</b>   | 2,048   |
| <b>Discrete Global Memory - %G</b>   | 1,280 bits  |
| <b>Internal Coils - %M</b>   | 4,096 bits  |
| <b>Output (Temporary) Coils - %T</b>   | 256 bits  |
| <b>System Status References - %S</b>   | 128 bits (%S, %SA, %SB, %SC - 32 bits each)   |
| <b>Register Memory - %R</b>  | Configurable in 128 word increments, from 128 to 16,384 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver. 2.2 when available.                      |
| <b>Analog Inputs - %AI</b>   | Configurable in 128 word increments, from 128 to 8,192 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver 2.2 when available.                        |
| <b>Analog Outputs - %AQ</b>  | Configurable in 128 word increments, from 128 to 8,192 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver. 2.2 when available.                       |
| <b>System Registers</b> (for reference table viewing only; cannot be referenced in user logic program) | 28 words (%SR)  |
| <b>Timers/Counters</b>   | >2,000 (depends on available user memory)   |
| <b>Shift Registers</b>   | Yes   |
| <b>Built-in Serial Ports</b>   | 3 (one uses connector on PLC power supply). Supports SNP, SNPX (on all three ports) and RTU (on Ports 1 and 2). Requires CMM module for CCM.  |
| <b>Communications</b>  | LAN – Supports multidrop. Also supports Ethernet, FIP, Profibus, GBC, GCM, and GCM+ option modules.   |
| <b>Override</b>  | Yes   |
| <b>Battery Backed Clock</b>  | Yes   |
| <b>Interrupt Support</b>   | Supports the periodic subroutine feature.   |
| <b>Type of Memory Storage</b>  | RAM and Flash   |
| <b>PCM/CCM Compatibility</b>   | Yes   |
| <b>Floating Point Math Support</b>   | <b>CPU351:</b> Firmware-based<br><b>CPU352:</b> Hardware-based (uses built-in math coprocessor)   |

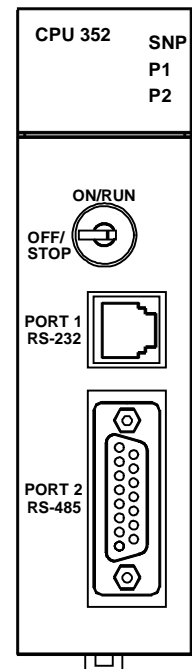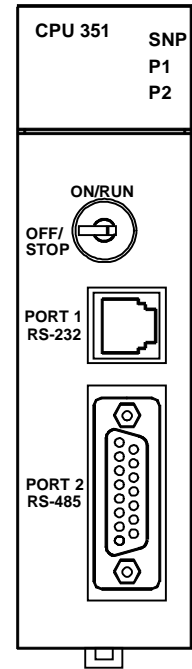


**Important Product Information**

GFK-1126U

**IC693CPU363-AA Data**

|  |   |
|--|---|
| <b>CPU Type</b>  | Single slot CPU module  |
| <b>Total Baseplates per System</b>   | 8 (CPU baseplate + 7 expansion and/or remote)   |
| <b>Load Required from Power Supply</b>   | 890 milliamps from +5 VDC supply  |
| <b>Processor Speed</b>   | 25 MegaHertz  |
| <b>Processor Type</b>  | 80386EX   |
| <b>Typical Scan Rate</b>   | .22 milliseconds per 1K of logic (Boolean contacts)   |
| <b>User Memory (total)</b>   | 240K (245,760) Bytes. Note: Actual size of available user program memory depends on the amounts configured for the %R, %AI, and %AQ configurable word memory types (described below). |
| <b>Discrete Input Points - %I</b>  | 2,048   |
| <b>Discrete Output Points - %Q</b>   | 2,048   |
| <b>Discrete Global Memory - %G</b>   | 1,280 bits  |
| <b>Internal Coils - %M</b>   | 4,096 bits  |
| <b>Output (Temporary) Coils - %T</b>   | 256 bits  |
| <b>System Status References - %S</b>   | 128 bits (%S, %SA, %SB, %SC - 32 bits each)   |
| <b>Register Memory - %R</b>  | Configurable in 128 word increments, from 128 to 16,384 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver. 2.2 when available.                      |
| <b>Analog Inputs - %AI</b>   | Configurable in 128 word increments, from 128 to 8,192 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver 2.2 when available.                        |
| <b>Analog Outputs - %AQ</b>  | Configurable in 128 word increments, from 128 to 8,192 words with DOS programmer, and from 128 to 32,640 words with Windows programmer Ver. 2.2 when available.                       |
| <b>System Registers (for reference table viewing only; cannot be referenced in user logic program)</b> | 28 words (%SR)  |
| <b>Timers/Counters</b>   | >2,000 (depends on available user memory)   |
| <b>Shift Registers</b>   | Yes   |
| <b>Built-in Serial Ports</b>   | 3 (one uses connector on PLC power supply). Supports SNP, SNPX (on all three ports) and RTU (on Ports 1 and 2). Requires CMM module for CCM.  |
| <b>Communications</b>  | LAN – Supports multidrop. Also supports Ethernet, FIP, Profibus, GBC, GCM, and GCM+ option modules.   |
| <b>Override</b>  | Yes   |
| <b>Battery Backed Clock</b>  | Yes   |
| <b>Interrupt Support</b>   | Supports the periodic subroutine feature.   |
| <b>Type of Memory Storage</b>  | RAM and Flash   |
| <b>PCM/CCM Compatibility</b>   | Yes   |
| <b>Floating Point Math Support</b>   | Yes, firmware-based   |

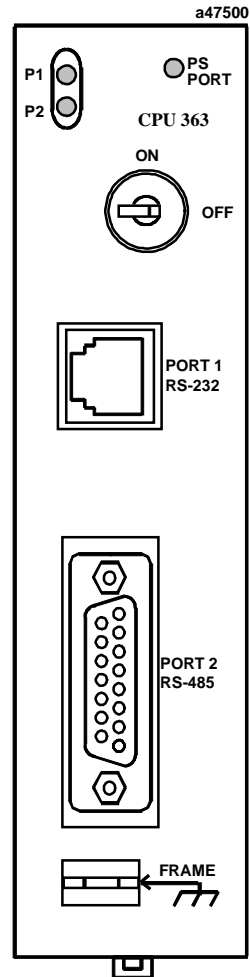

# CONTACT US & SUPPORT

NEED A QUOTE OR TECHNICAL PARTS REPLACEMENT?

---

**Company Name:** [PLC ProTech Ltd.](#)

**Online Support:** [www.plcprotech.com](http://www.plcprotech.com) (Click to Visit)

**Inquiry Email:** [sales@plcprotech.com](mailto:sales@plcprotech.com)

**Direct Hotline:** +86 18046317198

## Our Service Guarantee:

- 100% Brand New Original & Factory Sealed Components
- 12-Month Quality Warranty on All Industrial Parts
- Worldwide Same-Day Fast Dispatch via DHL / FedEx

[SUBMIT ONLINE RFQ \(REQUEST FOR QUOTE\) >>](#)