

# Expansion Memory


## IC697MEM713/715/717/719

GFK-0160F  
August 1997

### CMOS Expansion Memory

## Features

- Available in 64, 128, 256 and 512 Kbytes
- For expansion of CPU 771, CPU 772, or PCM
- Memory retained by battery on CPU or PCM
- Does not require additional slot
- Configurable for data and program storage
- Error checking by CPU checksum routine
- No tools required for installation
- Field Installable

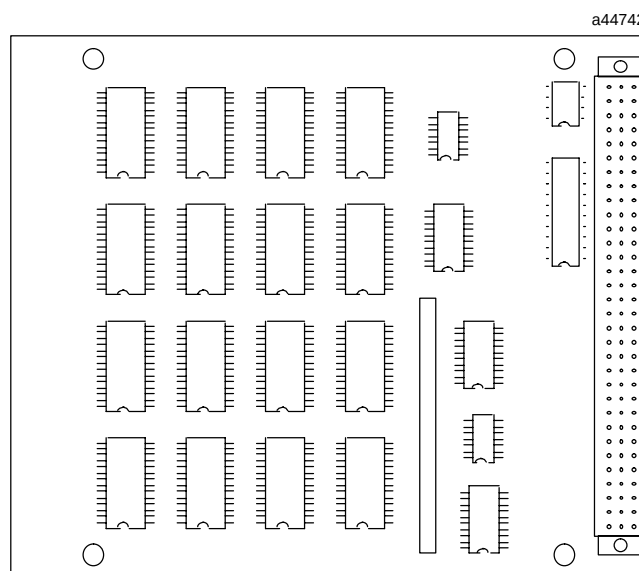

## Functions

This CMOS Expansion Memory is available in four versions; 64, 128, 256 and 512 Kbytes. This memory may be used to expand logic and data memory in either the CPU 771 (IC697CPU771) and CPU 772 (IC697CPU772) modules, or the Programmable Co-processor Module (IC697PCM711). It is installed as a daughter board and resides in the same slot as the module it serves. Memory on this board supplements memory available on the base board.

Memory is retained in the event of power loss by the battery on the base board housing.

Logic program memory is continually error-checked by the PLC CPU as a background task.

The PCM error checks storage memory when power is cycled and on hard or soft resets.

## 2

## Expansion Memory

GFK-0160F

August 1997

## CMOS Expansion Memory

## Installation

- Installation should not be attempted without referring to the applicable *Programmable Controller Installation Manual* (See reference 4).
- Make sure rack power is off.
- Plug the 64 pin connector into the connector on the base board, and engage snaps.
- Place module in rack.
- Turn power on.

## CPU Installation:

- Clear memory using either MS-DOS® or Windows® programming software following instructions in the *Programming Software User's Manual* (See reference 1).

## PCM Installation:

- For the PCM follow the instructions in the *Programmable Coprocessor Module Support Software User's Manual* (See reference 3).

## Batteries

The Lithium battery (IC697ACC701) is installed as shown in figure 1. This battery maintains user memory when power is removed and operates the calendar clock on the PLC CPU. Be sure to install the new battery before removing the old battery. Specific indication of a low battery state is detailed in References 3 and 4.

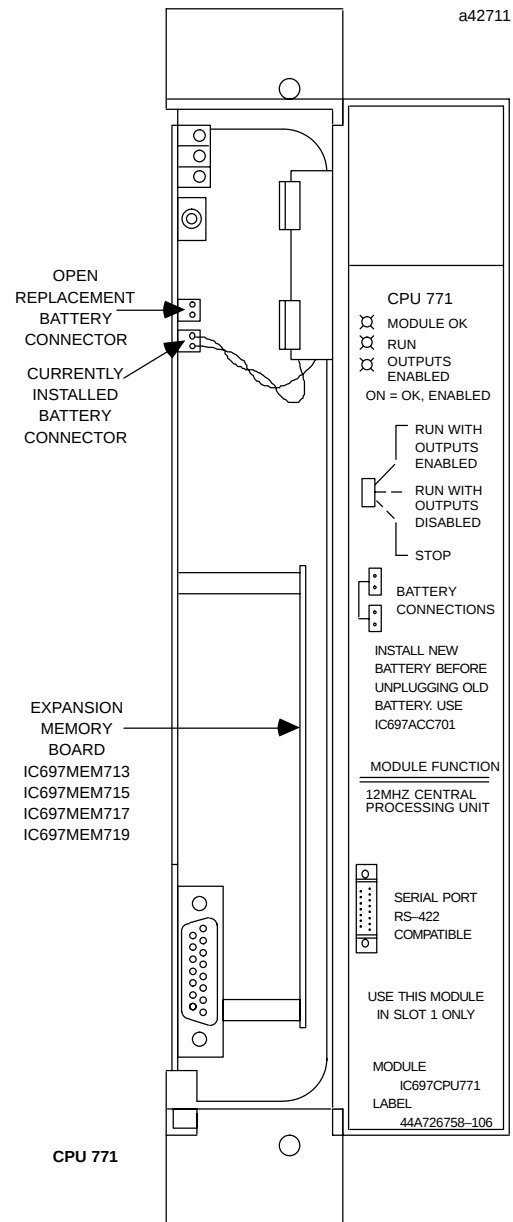


Figure 1. Location of Expansion Memory and Battery on CPU771/772 and PCM

## Expansion Memory

3

## CMOS Expansion Memory

GFK-0160F  
August 1997

Table 1. References

| Reference | Title                                                              |
|-----------|--------------------------------------------------------------------|
| 1         | ProgrammingSoftware User's Manual                                  |
| 2         | Programmable Controller Reference Manual                           |
| 3         | Programmable Coprocessor Module and Support Software User's Manual |
| 4         | Programmable Controller Installation Manual                        |

Table 2. Specifications for IC697MEM713/715/717/719 †

|                         |                                                 |
|-------------------------|-------------------------------------------------|
| <b>Battery</b>          |                                                 |
| <b>Shelflife</b>        | 10 years at 20° C (68° F)                       |
| <b>Memory retention</b> | 6 months nominal without applied power.         |
| <b>VME</b>              | System designed to support the VME standard C.1 |

† Refer to GFK-0867B, or later for product standards and general specifications.

Table 3. Ordering Information

| Description                     | Catalog Number |
|---------------------------------|----------------|
| 64 Kbyte CMOS Expansion Memory  | IC697MEM713    |
| 128 Kbyte CMOS Expansion Memory | IC697MEM715    |
| 256 Kbyte CMOS Expansion Memory | IC697MEM717    |
| 512 Kbyte CMOS Expansion Memory | IC697MEM719    |
| Lithium Battery                 | IC697ACC701    |

Note: For Conformal Coat option, or Low Temperature Testing option please consult the factory for price and availability.



# CONTACT US & SUPPORT

NEED A QUOTE OR TECHNICAL PARTS REPLACEMENT?

**Company:** [PLC ProTech Ltd.](#)

**Website:** [www.plcprotech.com](http://www.plcprotech.com)

**Email:** [sales@plcprotech.com](mailto:sales@plcprotech.com)

**Phone:** +86 180 4631 7198

## Our Service Guarantee:

- 100% Brand New Original & Factory Sealed Components
- 12-Month Quality Warranty on All Industrial Parts
- Worldwide Same-Day Fast Dispatch via DHL / FedEx

**SUBMIT ONLINE RFQ (REQUEST FOR QUOTE) >>**

[About Us](#) · [Contact](#) · [All Products](#)